

905nm 30mW FP SM coaxial laser diode Version: sample 18-09-01

Model: LSFLD905-30

Features:

- MQW F-P LD
- Single mode
- Built-in monitor PD
- Metal can type hermetic
- Low threshold/operate current
- High reliable



Applications:

- Optical Sensing
- Industrial automatic control
- Science analysis and experiment
- Test and Measurement Equipment
- Laser range finder

Absolute maximum ratings:

parameter	symbol	value	unit
Operating temperature	Top	-10~+70	°C
Storage temperature	Tstg	-40~+85	°C
Laser diode Reverse voltage	V _r	2	V
Soldering temperature/time		260/10	°C/S

Electrical and optical characteristics:(T=25°C)


parameter	symbol	Min.	Typ,	Max.	unit
Center wavelength	λ	895	905	915	nm
Threshold Current	I _{th}		28	50	mA
Operating Current	I _{op}		135	165	mA
Spectral width	Δλ		3		nm
Operating Voltage	V _{op}		1.9	2.4	V
Light output power(from SM fiber)*1	P _o (CW)		30		mW
Slope Efficiency	SE	0.8	1.0		mW/mA
Monitor Output Current	I _m	0.1	0.5	1.0	mA
package	Hermetic TO56 Can with fiber coupling or receptacle				

*1 Note: for 62.5um MM fiber, the output power can double.

For 5um SM fiber (NA =0.13), the output power can reduce about 50%



NOTICE: The above product specifications are subject to change without notice.

The package Dimensions

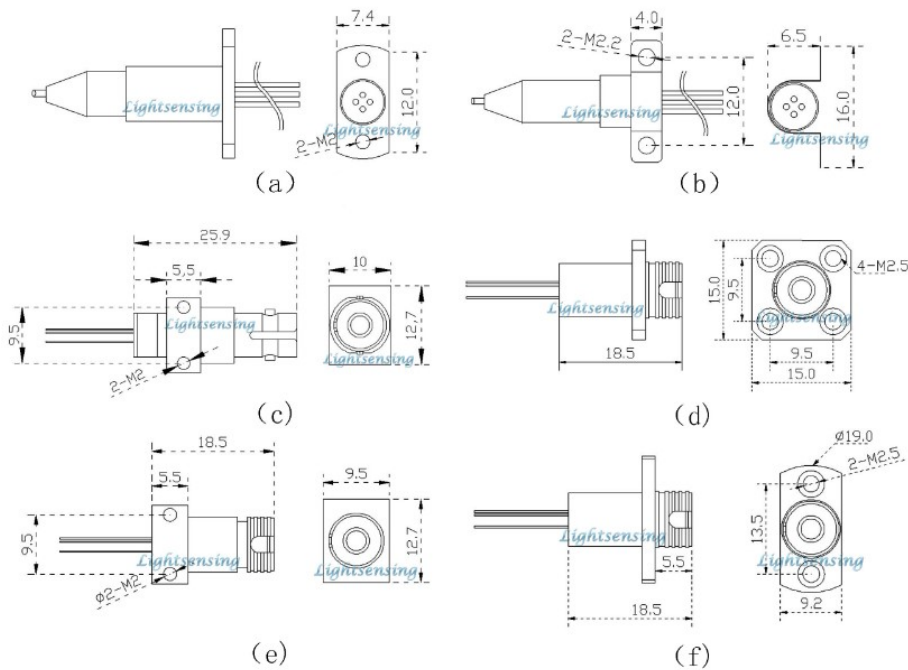

PIN description

Bottom View



pin	function
1	LD Cathode
2	LD anode, PD cathode, case
3	PD anode

Order information

LSFLD905-X-X

mW	X=a	a package with 5um SM, 9um SM or MM Fiber coupling with FC/UPC or FC/APC connector
X=30	X=b	b package with 5um SM, 9um SM or MM Fiber coupling with FC/UPC or FC/APC connector
X=other	X=cJKST	c package with ST receptacle
	X=dJKFC	d package with FC receptacle
	X=e JKFC	e package with FC receptacle
	X=f JKFC	f package with FC receptacle
	X=Other	By customer's request

The cautions

- 1: The above product specifications are subject to change without notice.
- 2: The suitable ESD protection is required in storage, transportation and using
- 3: The fiber bending radius no less than 20mm for avoiding fiber damaged, Be sure the fiber coupling facet is clean before connecting it to opto-circuit.

地址：北京市海淀区苏州街 33 号 12 层 1202 邮编：100080

Address: Floor 12 Rm 1202, No 33 Suzhou Street, Haidian District, Beijing 100080, China.

TEL: +86-010-82873449 FAX: +86-010-62557230 Email: info@lightsensing.com Website: www.lightsensing.com