

2mm InGaAs PIN photodiode


V4.1LPD-007 20-10-01

Model: LSIPD-L2
Features:

- High reliability, low dark current
- 800-1700nm spectral range
- Active diameter 2mm
- Hermetic TO5 Can or with receptacle

Applications:

- Optical sensor
- Optical power meter
- Industrial automatic control
- Science analysis and experiment
- Space light detect equipment
- Response spectrum testing

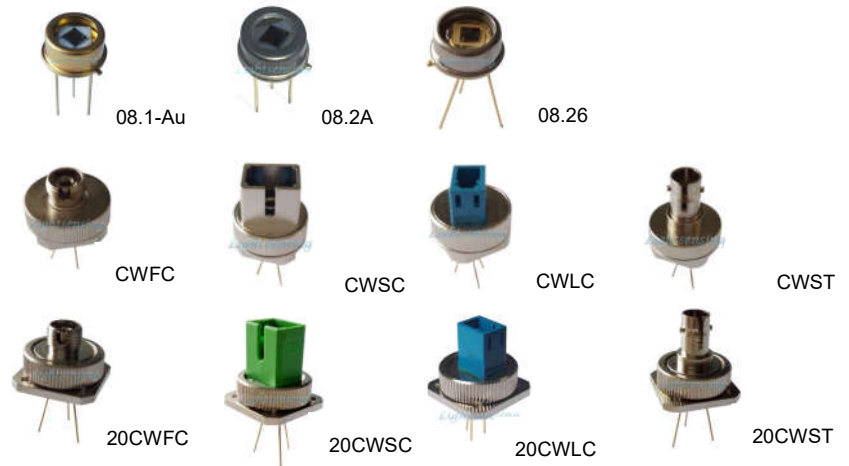
Absolute maximum ratings:

parameter	symbol	value	unit
Operating temperature	Top	-40~+85	°C
Storage temperature	Tstg	-40~+100	°C
Reverse voltage	Vr	5	V
Soldering temperature(time)	Ts (10s)	260	°C

Electrical and optical characteristics:(T=25°C)

parameter	symbol	unit	Value (typ.)
Active diameter	Φ	mm	2
Spectral range	λ	nm	800-1700
Responsivity	Re(Vr=0V, λ =1310nm)	mA/mW	0.85
	Re(Vr=0V, λ =1550nm)	mA/mW	0.90
Response time	Tr (RL=50 Ω , Vr=3V)	ns	50
Dark current	Id(Vr=0V)	nA	0.7
	Id(Vr=3V)	nA	2
Reverse Breakdown voltage	VBR (Ir=10uA)	V	15
Total capacitance	Cj (f=1MHz, Vr=0V)	pF	1500
	Cj (f=1MHz, Vr=3V)	pF	300
Saturated Optical Power	Ps(Vr=0V)	mW	5(Min.3)
	Ps(Vr=3V)	mW	15
Reverse operating voltage	Vr	V	0-3
Shunt resistance	Rsh (Vr=10mV)	M Ω	15
package	Hermetic TO5 Can or with receptacle		

NOTICE: The above product specifications are subject to change without notice.


The typical Responsivity curve


地址: 北京市海淀区苏州街33号12层1202 邮编: 100080


Address: Floor 12 Rm 1202, No 33 Suzhou Street, Haidian District, Beijing 100080, China.

 TEL: +86-010-82873449 FAX: +86-010-62557230 Email: info@lightsensing.com Website: www.lightsensing.com


TO package and Lead




flat window 3PIN 8.1mm TO
Model: 08.1



flat window 3PIN 8.2mm TO
Model: 08.2



flat window 3PIN 8.26mm TO
Model: 08.26

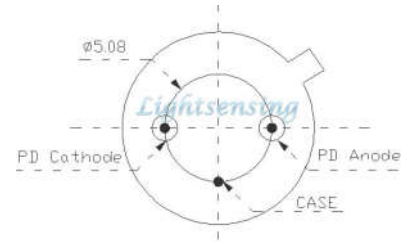

3PIN Bottom View

Note: For more information on dimension, please contact us.

Order information

LSIPD-L2-X

- X=08.1-Au TO5 Can with flat window ϕ 8.1mm Au cap(**Standard products**)
- X=08.2A TO5 Can with flat window ϕ 8.2mm nickel cap and Antireflection Coatings
- X=08.26-Au TO5 Can with flat window ϕ 8.26mm Au cap
- X=08.26 TO5 Can with flat window ϕ 8.26mm nickel cap
- X=08.26A TO5 Can with flat window ϕ 8.26mm nickel cap and Antireflection Coatings(**Standard products**)
- X=CWFC TO5 Can with replaceable receptacle with FC connector
- X=CWSC TO5 Can with replaceable receptacle with SC connector
- X=CWLC TO5 Can with replaceable receptacle with LC connector
- X=CWST TO5 Can with replaceable receptacle with ST connector
- X=CWFC-5/12/16/20dB TO5 Can with replaceable receptacle with FC connector and 5/12/16/20dB attenuation
- X=CWSC-5/12/16/20dB TO5 Can with replaceable receptacle with SC connector and 5/12/16/20dB attenuation
- X=CWLC-5/12/16/20dB TO5 Can with replaceable receptacle with LC connector and 5/12/16/20dB attenuation
- X=CWST-5/12/16/20dB TO5 Can with replaceable receptacle with ST connector and 5/12/16/20dB attenuation
- X=20CWFC TO5 Can with 20mm replaceable receptacle with FC connector
- X=20CWSC TO5 Can with 20mm replaceable receptacle with SC connector
- X=20CWST TO5 Can with 20mm replaceable receptacle with ST connector
- X=20CWLC TO5 Can with 20mm replaceable receptacle with LC connector
- X=Other By customer's request

The cautions

- 1: The above product specifications are subject to change without notice.
- 2: The suitable ESD protecting measures are recommend in storage,transporting and using.

